
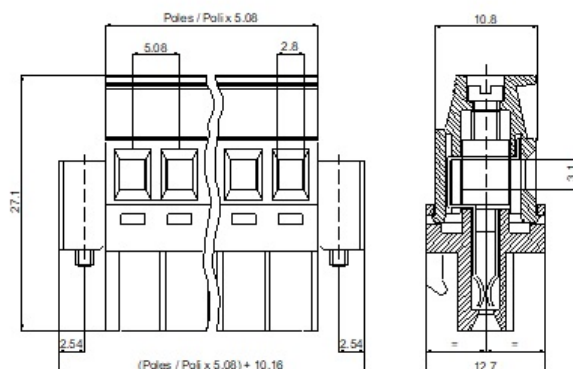


SV__-5,08-P-K

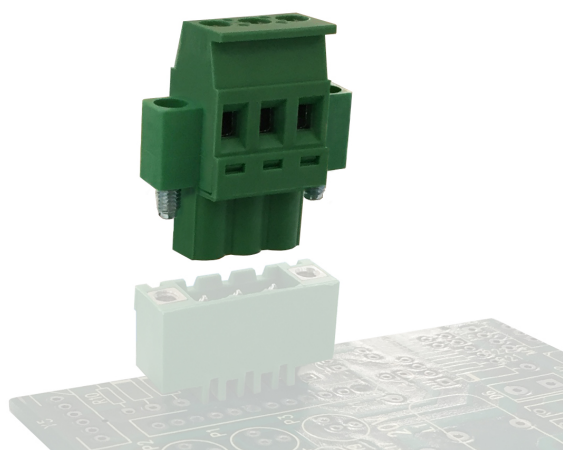

* la tige est en acier
 * la tige a une largeur de 3.1 mm

GENERAL INFORMATION

pitch	5,08 mm
Height	27.6 mm
Depth	13.5 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	2.8 x 3.1 mm
Wire stripping	max 3 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	250 V
impulse voltage	4 kV

MECHANICAL CHARACTERISTICS

Screw	M3
Recommended torque	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



	EN 61984	EN 61984	UL 1059
Current	16 A	12 A	12 A factory / 12 A field
Voltage	250 V	250 V	300 V
Wire section	2.5 mm ²	2.5 mm ²	14 AWG
Torque	0.5 Nm	0.5 Nm	4.5 Nm
FILE	CA02.04178	40005779	E178356

MATERIALS

Housing	PA - UL 94 V0
Screw	Galvanized steel
Clamp	Nickel-plated copper alloy
Terminal	Nickel-plated copper alloy
SCIP Number	269cc4c7-8d06-4994-abfa-5163d2b356bd

COLOURS

			On request					
Standard								
GN			GY	BK	BL	RD	YL	OG
POLES	NAME		3D FILE					
02	SV02-5,08-P-K		File not available for this product					
03	SV03-5,08-P-K		File not available for this product					
04	SV04-5,08-P-K		File not available for this product					
05	SV05-5,08-P-K		File not available for this product					
06	SV06-5,08-P-K		File not available for this product					
07	SV07-5,08-P-K		File not available for this product					
08	SV08-5,08-P-K		File not available for this product					
09	SV09-5,08-P-K		File not available for this product					
10	SV10-5,08-P-K		File not available for this product					
11	SV11-5,08-P-K		File not available for this product					
12	SV12-5,08-P-K		File not available for this product					
13	SV13-5,08-P-K		File not available for this product					
14	SV14-5,08-P-K		File not available for this product					
15	SV15-5,08-P-K		File not available for this product					
16	SV16-5,08-P-K		File not available for this product					
17	SV17-5,08-P-K		File not available for this product					
18	SV18-5,08-P-K		File not available for this product					
19	SV19-5,08-P-K		File not available for this product					
20	SV20-5,08-P-K		File not available for this product					
21	SV21-5,08-P-K		File not available for this product					
22	SV22-5,08-P-K		File not available for this product					